


*"Touch" the touch me not
Impeccable Design!*

*Simple, Smart
Safe & Dynamic*



Touch / RF Tag / Key
Wireless / NFC

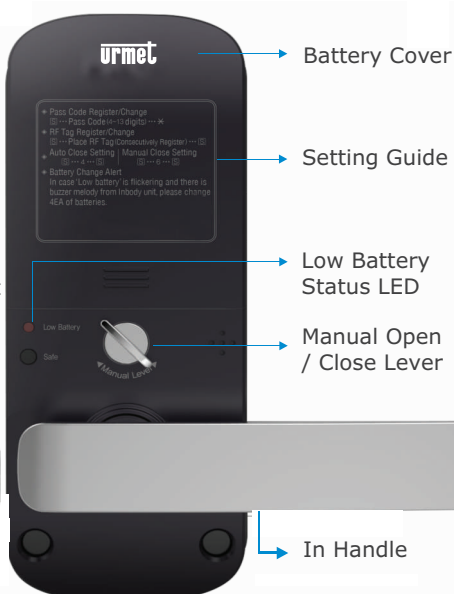

One Universal Design.
Left hand or Right hand,
Inside or Outside.



Secure (20x25)mm Steel
Bolt with Auto-close/
Tamper Sensor.



Passcode Hide Function.



Wireless Remote Connect
Option Model: EL2014TR

EL2014T

EL2014T

Digital Door Lock

Touch / RF Tag / Key / Wireless / NFC

Specifications

Rated Voltage	6V DC (4EA1.5V AA Type Alkaline Batteries)
Type	Electronic & Mechanical (Pass Code, RF Tag Key)
Weight	2.2 kg (Include Packing)
Usage Temperature	-20°C ~ 60°C
Sensor Activating Temperature	80°C +_ 10°C
Material	Outbody 72(W) x 190(H) x 21 (D) diecasting
Dimensions	Inbody 72(W) x 190 (H) x 250(D) / RF ABS / Zinc diecasting
Battery Life	1 year if used 10 times a day, Battery Life depends on battery quality usage frequency or usage environment
Emergency Power	9V Alkaline battery (6Lf22) IEA (Optional Product)
Wireless	Built in Receiver and Transmitter to connect Home Automation (Optional) Model EL2014TR
NFC Technology	Supports Near Field Communication (NFC) of standard Smart Phones



Features



Intrusion Alert Function

Internal buzzer alarm is activated in case the lock is tampered with.



Pass code Hide Function

To prevent someone from noticing the registered pass code, An imaginary numbers (up to 16 digits) can be entered before entering the correct 4 ~ 13 digit pass code.



Child Proof Function

When incorrect pass code or RF tag is used for 5 consecutive times, The system freezes for 60 seconds.



High Temperature / Fire Alert Function

When high temperature above 80° is detected, deadbolt switches automatically to open condition & internal Alarm is activated.



Deadbolt Jamming Alert Function

In case of malfunctioning due to deadbolt being stuck at the strike or the door not being completely closed, buzzer is activated and front LED flickers.



Volume Control Function

Can choose mute, low or high for the buzzer sound.



Auto / Manual Lock Setting

Door Locks automatically certain time after the door opens or closes. Manual lock setting keeps the door open at all times.



Low Battery Function

In case of low battery, low battery buzzer sound goes off and LED flickers.



Night Lock Function

This function prohibits someone from opening the door using pass code or RF Tag alone from outside.



Etiquette Mode Function

It allows turning on / off the buzzer sound when using digital door lock. It is one time function which automatically deactivates after the regular procedure.



Wireless Contact

Can connect to Home Network system/ Video phone to open the door remotely (Optional) Model EL2014TR.



Fire Proof Durability

Best in class durability and safety standards, using Zinc die - casting material resistant to fire or physical force.



Anti Shock, Anti Static

Superior Circuit prevents the digital door lock to open from any kind of Electric shock.



Customer Care : +91 124 4300630
Toll Free Support : 1800 103 1161
Sales : sales@albaumet.com
Service : service@albaumet.com
Tech Support : support@albaumet.com
Web : www.albaumet.com